


BONT[®]

Bont Technologies GmbH

Multipoint Float Level Switch

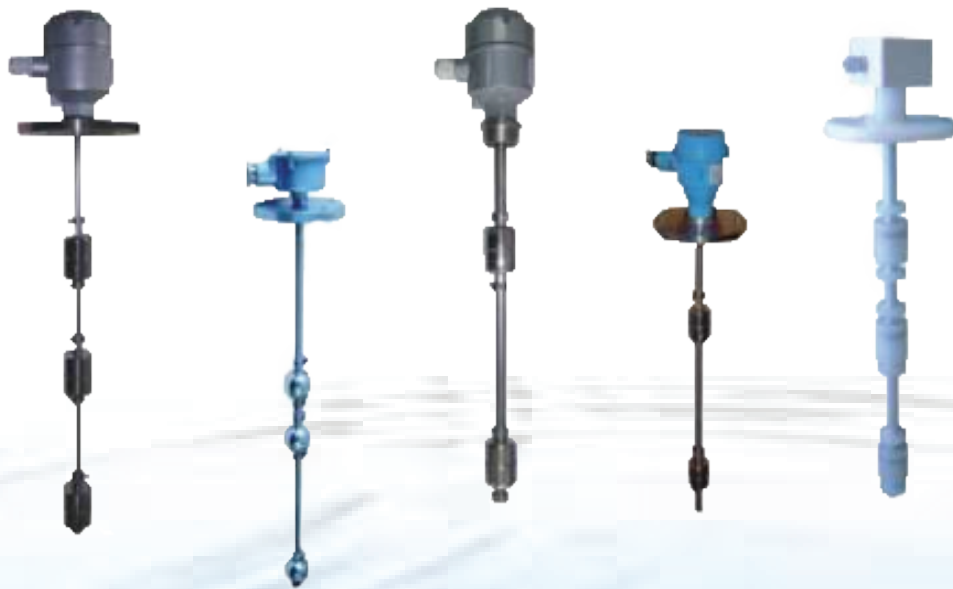

Features

Originally imported magnetic reed switch, services life of contact is up to 10 times. Simple working principle, stable, reliable performance & long service life. Various materials like SUS, PP, PVC, PVDF / PTFE.

Installation

1. Internal diameter of the internal screw should ne bigger than the diameter of float.
2. If there is big fluctuation in the liquid, please install protection tube additionally.
3. When mounting, please keep distance from the inlet.
4. Please prevent the float to get stuck by sediments.

Selection Description

FS - - - - -

① ② ③ ④ ⑤ ⑥

1. Model	MFS		
2. Junction Box	B	Standard	
	E	Simple	
	P	Anti-Corrosive	
	K	Ex-Proof	
	N	Without Junction Box	
3. Float Size	A	SUS316 Cylinder	DIA 28 x 28 x 9.5
	B	SUS316 Cylinder	DIA 45 x 55 x 15
	C	SUS316 Sphere	DIA 52 x 52 x 15
	D	SUS316 Sphere	DIA 75 x 75 x 23
	E	PP Cylinder	DIA 48 x 50 x 19
	F	PVDF Cylinder	DIA 60 x 70 x 24
4. No. of Float	1	One	
	2	Two	
	3	Three	
	4	Four	
5. Process Connection	F	Flange	
	S	Screw	
	C	Clip	
	X	Others	
	FK	Flange adjustable	
	SK	Screw adjustable	
6. Total Length	Unit	mm	

Distributor By